

shown in Matte Black  
with 52" Walnut blades



# Patrícia-3

*Designed in 2015*

A complement to any commercial or residential space, the Patrícia-3 seamlessly combines innovation with simple, refined design. Its elegant aesthetic belies its robust construction. Solid wood walnut, matte black, matte white, or barn wood tone blades revolve around a balanced, cylindrical DC motor housing. Air is circulated efficiently with barely more than a whisper. An eco-conscious LED light kit completes the package, making Patrícia-3 sophisticated, efficient and green. Constructed of cast aluminum and heavy stamped steel, the Patrícia-3 carries a limited lifetime warranty.

## Product Features



DC  
Motor



Damp  
Location



Silent



LED  
Lamp



Dimmable  
Lamp



Remote  
Control



Wall  
Control



30° Slant  
Ceiling Canopy



60° Cathedral  
Ceiling Canopy



shown in Brushed Brass with 42" Walnut blades

shown in Gloss White with 60" Matte White blades

shown in Polished Chrome with 42" Matte Black blades

shown in Brushed Nickel with 42" Barn Wood blades

shown in Textured Bronze with 42" Walnut blades

shown in Matte Black with 52" Walnut blades

**Blade Options**



# PATRÍCIA-3

## FINISH AND BLADE OPTIONS

|                   |  |      |
|-------------------|--|------|
| SKU#              | PA3-XX-XXX-XX<br>(Model+Finish+Blade+Diameter) |      |
| Standard Finishes | Brushed Brass                                  | BRBR |
|                   | Brushed Nickel                                 | BN   |
|                   | Polished Chrome                                | CR   |
|                   | Textured Bronze                                | TB   |
|                   | Gloss White                                    | WH   |
|                   | Matte Black                                    | BK   |
| Blade Finishes    | Barn Wood Tone                                 | BW   |
|                   | Matte Black                                    | BK   |
|                   | Matte White                                    | MWH  |
|                   | Walnut Tone                                    | WA   |
| Fan Diameter      | 42 inches / 107 cm                             | 42   |
|                   | 52 inches / 132 cm                             | 52   |
|                   | 60 inches / 152 cm                             | 60   |

## TECHNICAL SPECS

|   |  |
|---|--|
| Fan Diameter  | inches: 42, 52 or 60<br>centimeters: 107, 132 or 152                                 |
| Blade Material  | CNC Cut Solid Wood   |
| Overall Drop  | 14 inches / 36 cm + downrod length   |
| Fan Weight  | 19 lbs   |
| Downrods Lengths<br><i>Field cuttable. Non-threaded</i> | inches: 5, 10, 20, 30, 48, 72<br>centimeters: 13, 25, 51, 76, 122, 183               |
| Downrod Diameter  | 1 inch   |
| Voltage   | 110 or 220   |
| Motor Type  | DC   |
| Environment   | Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible. |
| Ambience  | Silent   |
| Safety Certification                                    | ETL / CETL   |
| Warranty  | Limited Lifetime   |

## NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Diameter     | 42 inch / 107 cm | 52 inch / 132 cm | 60 inch / 152 cm |
|------------------|------------------|------------------|------------------|
| RPM (Low / High) | 52 / 232         | 51 / 219         | 51 / 156         |
| CFM (Low / High) | 860 / 4286       | 1283 / 6077      | 2113 / 6833      |
| Watts (High)     | 16.60            | 32.03            | 31.72            |
| CFM/Watt (High)  | 211              | 182              | 219              |
| Blade Pitch      | 15°              | 15°              | 15°              |

## LIGHT KIT PHOTOMETRICS

|                            |                |
|----------------------------|----------------|
| Lamping (Replaceable)      | Integrated LED |
| Remote Dimmable            | Yes            |
| Delivered Temperature in K | 3075           |
| Delivered Lumens           | 690            |
| CRI                        | 90             |
| Watts                      | 16             |
| Hours                      | 60,000         |

Light kit longevity if used 6 Hours/Day: 27.4 Years

## STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Light cover

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control




**ACCESSORY** 60° cathedral ceiling canopy

NOTE: Only compatible with included controllers.

# Patrícia-3

## TECHNICAL SPECIFICATIONS

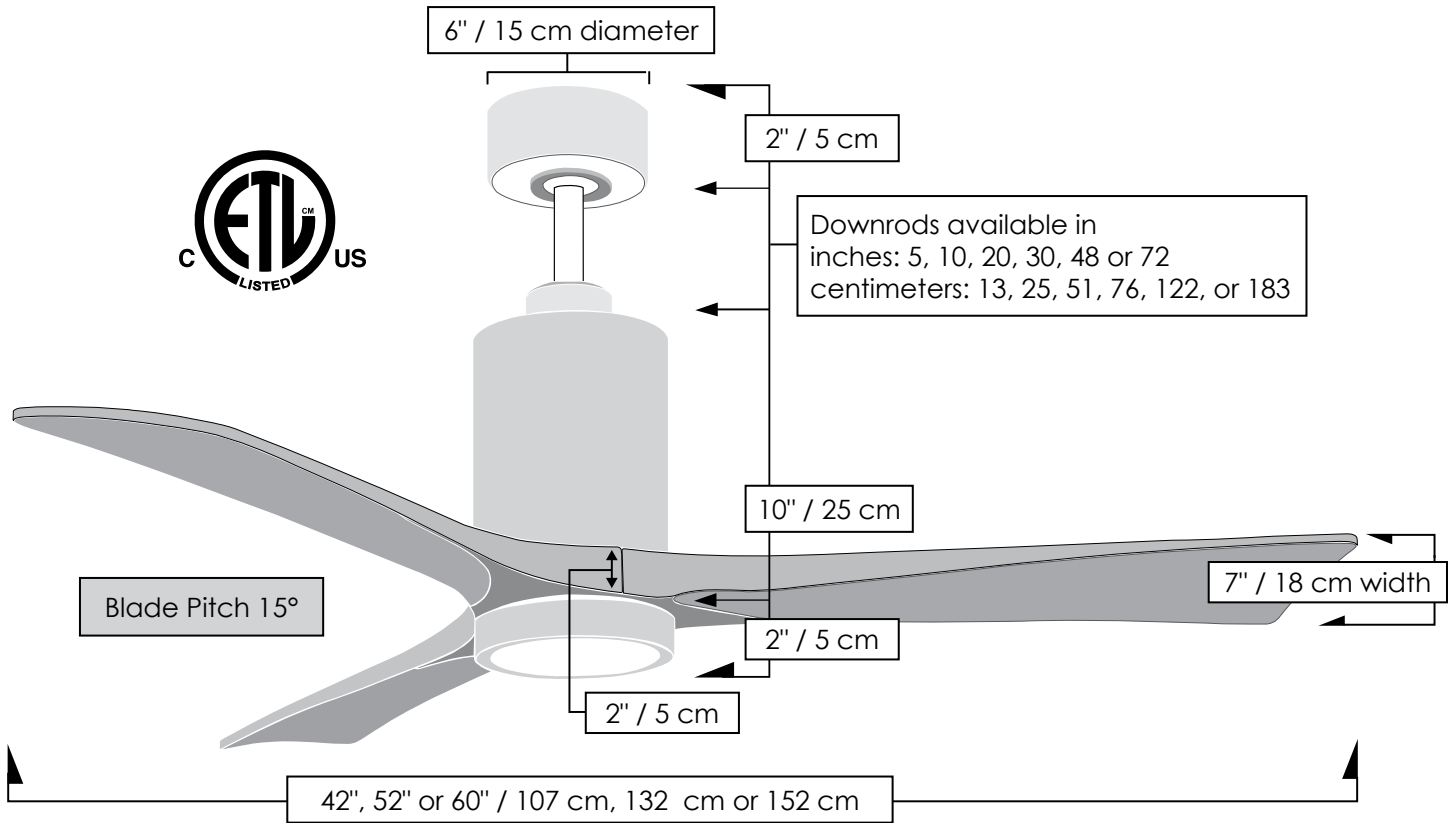

| CEILING PITCH TABLE |               |
|---------------------|---------------|
| 0/12                | 0 degrees     |
| 1/12                | 4.76 degrees  |
| 2/12                | 9.46 degrees  |
| 3/12                | 14.04 degrees |
| 4/12                | 18.43 degrees |
| 5/12                | 22.62 degrees |
| 6/12                | 26.57 degrees |
| 7/12                | 30.26 degrees |
| 8/12                | 33.69 degrees |
| 9/12                | 36.87 degrees |
| 10/12               | 39.81 degrees |
| 11/12               | 42.51 degrees |

| CEILING HEIGHT / DOWNROD TABLE |   |
|--------------------------------|---|
| Ceiling Height                 | Downrod Lengths<br><i>Field cuttable. Non-threaded</i>    |
| 10 ft or less                  | 5 inches / 13 cm<br><i>Use safety cages if applicable</i> |
| 10 -12 feet                    | 10 inches / 25 cm   |
| 13 feet                        | 20 inches / 51 cm   |
| 14 feet                        | 30 inches / 76 cm   |
| 15 feet                        | 48 inches / 122 cm  |
| 16 feet +                      | 72 inches / 183 cm  |

### Matthews Fan Company

1881 Industrial Drive  
 Libertyville, IL 60048  
 Tele: 847.680.9043  
 Fax: 847.680.8140  
 www.matthewsfanco.com

© 2023 Matthews Fan Company. All rights reserved.

